


确认后请签字并回传:

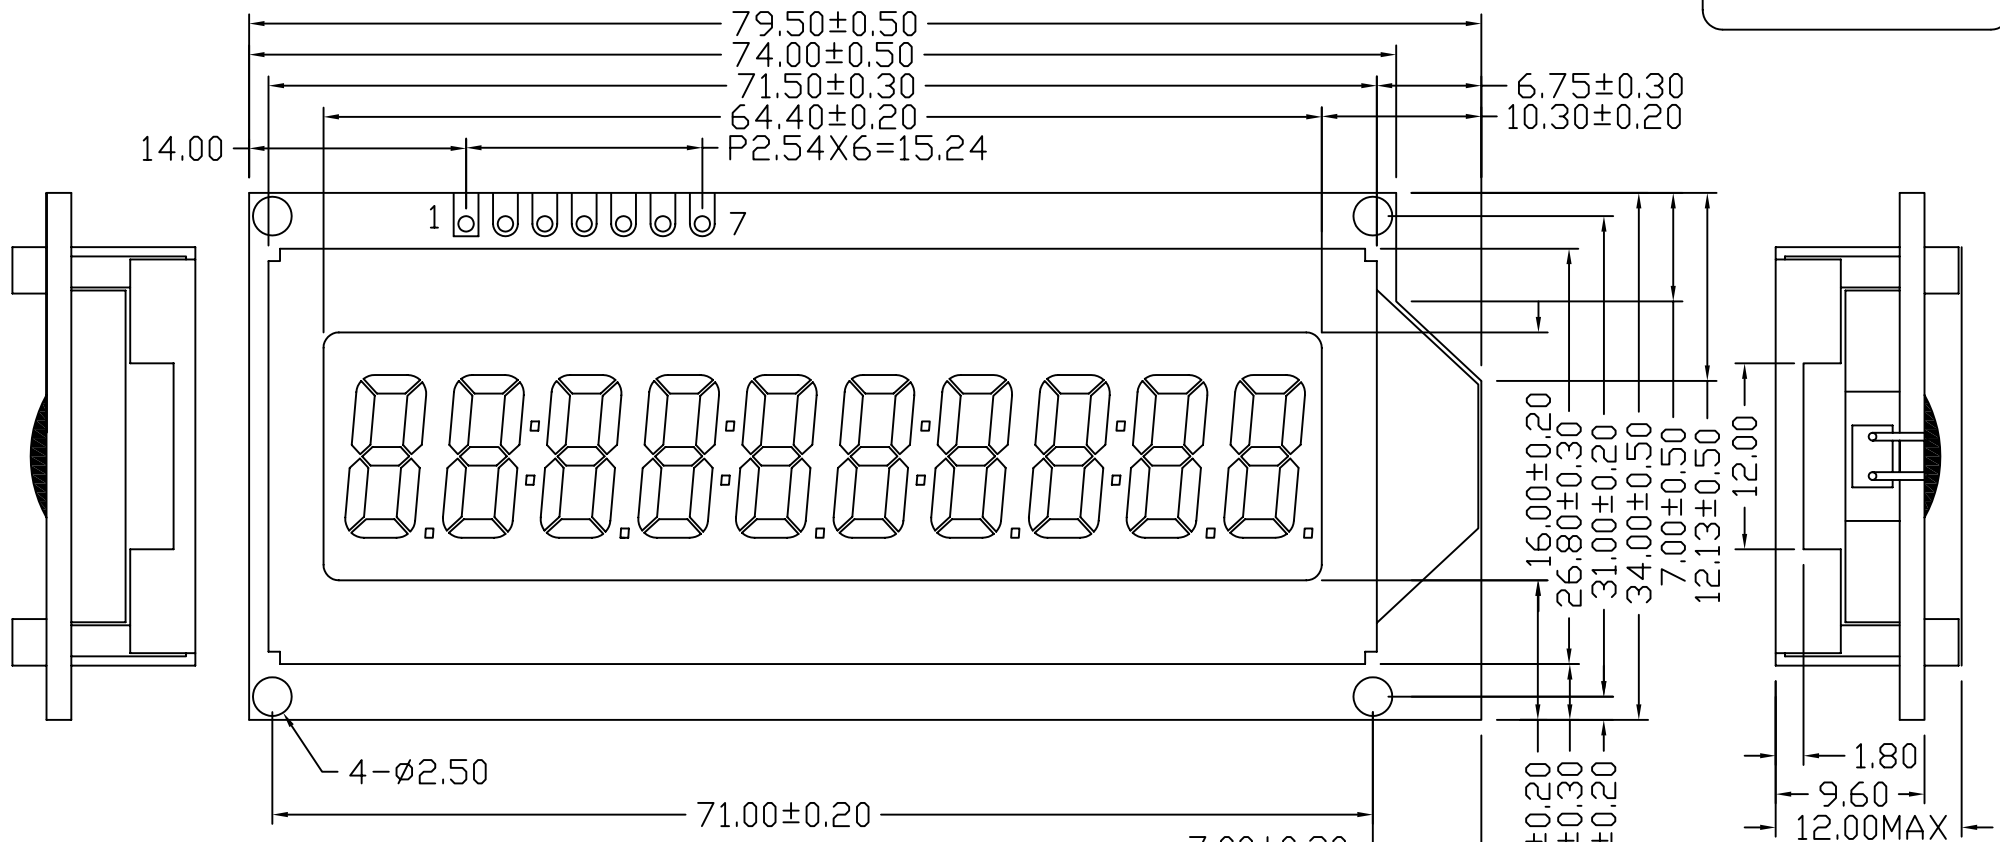

NOTES:

- 1.DISPLAY TYPE: TN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: -20°C--+70°C
- 5.STORAGE TEMP: -30°C--+80°C
- 6.VDD: +5.0V
- 7.LCD OPERATING VOLTAGE: 4.7V
- 8.DRIVE METHOD: 1/4 DUTY 1/3BIAS
- 9.DRIVE: HT1621
- 10.BACKLIGHT TYPE:LED(BLUE;3.1±0.1DCV;25mAMAX)
- 11.ALL UNMARKED TOLERANCES: ±0.30mm

1	2	3	4	5	6	7
CS	WR	DATA	GND	VDD	A(LED+)	K(LED-)

NTIERAY ELECTRONIC & PLASTIC CO., LTD.		
绘图:	绘图编号: YMTC-Z1621EDPSBWD	单位: mm
审核:	客户编号: YMTC-Z1621EDPSBWDG-1	日期:
批准:	图纸版号: G-1	页数: